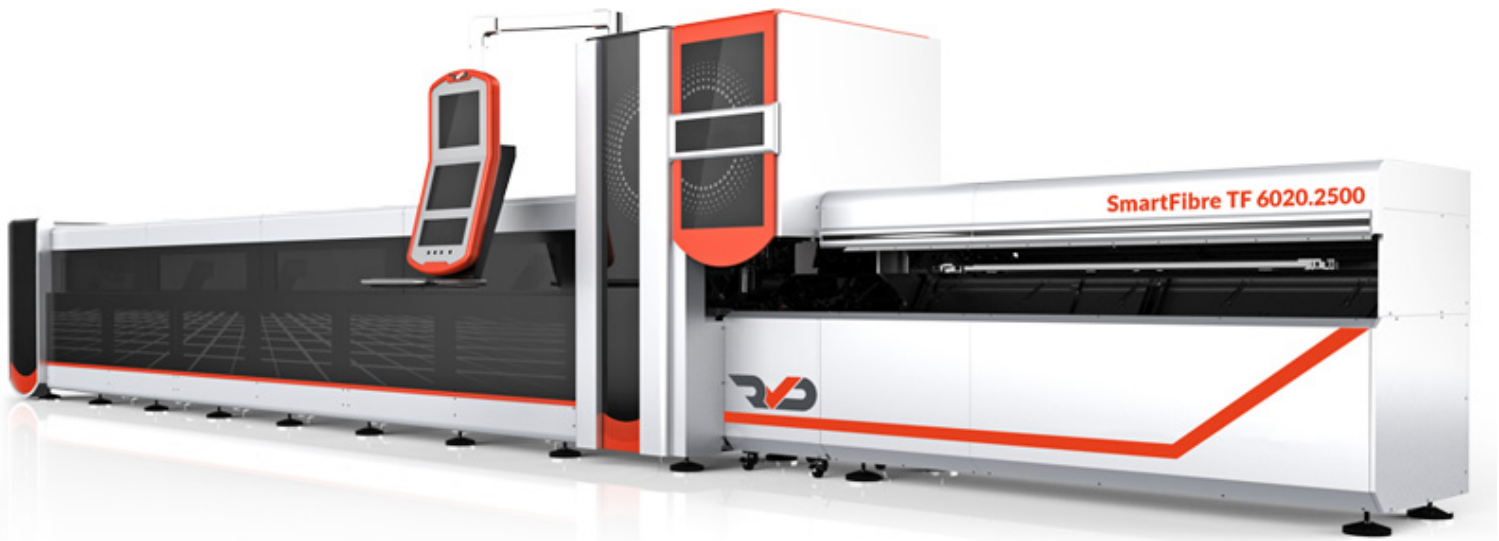

RVD SMARTFIBRE TF 8025.3000 CNC FIBRE LASER TUBE CUTTING MACHINE



The RVD SmartFibre TF [tube laser cutting machines](#) are an excellent solution for laser cutting with a vast variety tubular profiles and other sections of various lengths, diameters, materials and wall thicknesses. For the ultimate productivity these machines can be fitted with an automatic loading system for processing of bundles of up to 2500kg. Driven by powerful Lantek Flex3d processing and nesting software, developed specifically for tube cutting, these machines can produce intricate components in a variety of profiles, including round, square, oval and flat sided oval. An optional Lantek module is also available for processing flat bar and open sided parts such angles and channels. These models are specified with class leading components including a Raytools auto focus cutting head, Yasakawa drives and Raycus fibre laser sources in power ratings from 1.5 to 6kW.

FEATURES

- High performance Raycus fibre laser technology
- Raytools high performance torch with crash protection system
- Automatic height sensor to ensure optimum cutting efficiency
- Fully enclosed cutting area
- Self centring pneumatic clamping chuck in highly stable cast iron frame
- Self centring pneumatic feeding chuck
- Automatic infeed support system
- Automatic outfeed support and unloading system
- Laser chiller unit
- Class leading brand components
 - Raycus laser source – China
 - Raytools auto focus cutting head – Switzerland
 - Power Automation Higerman CNC control – Germany
 - Lantek Flex3d CAD/CAM software – Spain
 - Schneider electrics – France
 - YYC rack and pinion - Taiwan
 - Hiwin linear guides – Taiwan
 - Yaskawa servo motor and driver - Japan

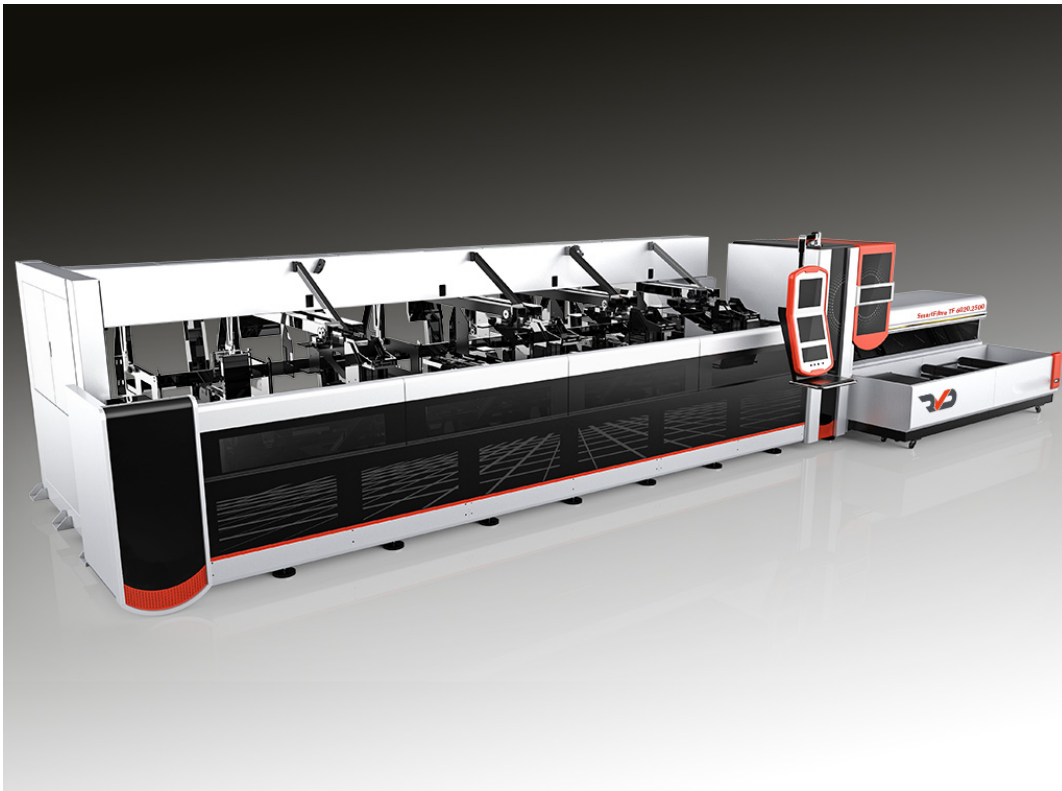
OPTIONS

- IPG Photonics laser source instead of Raycus
- Magazine loading system
- Welding seam detection
- Lantek module for open profiles e.g. angle, channel, flats
- Bevel cutting head
- Automatic de-slagging
- Increase outfeed system length
- Extraction/filtration system

TECHNICAL INFORMATION

Maximum Tube Length	mm	8000
Tube Diameter Range	mm	20 - 250
Positioning Speed	m/min	90
Axis Acceleration	G	1.2
Positioning Accuracy	mm	±0.05
Repeatability	mm	±0.03
Laser Power	kW	3.0
Cutting Capacity		
Mild Steel	mm	20
Stainless Steel	mm	12
Aluminium	mm	10
Brass	mm	8
Copper	mm	6
Galvanised Mild Steel	mm	8
Motor Power - Machine	kW	30.5
Motor Power - Optional Magazine Loading System	kW	8
Motor Power - Optional Extraction/Filtration System	kW	5.5
Length	mm	13400
Width	mm	2700
Width (with Optional Magazine Loading System)	mm	5000
Height	mm	2300
Weight	kg	9000
Weight (with Optional Magazine Loading System)	kg	17000

OTHER IMAGES



Pictured with optional magazine loading system