

**MORGAN RUSHWORTH XR 3015.2000 2.0KW FIBRE LASER CUTTING MACHINE**

The Morgan Rushworth XR range of fibre lasers are equipped with a 3 x 1.5m cutting area with automatic shuttle table with dual pallet changer enabling parts to be safely loaded and unloaded whilst the machine is still cutting. The design includes the fibre laser source inside the body of the machine resulting in a compact footprint, ideal for the smaller workshop, as well as fast start up time from delivery of the machine to production cutting. Class leading components ensure superior cut quality, high reliability and reduced down time.

The range covers from 1kW up to 8kW which with the high performance rack and pinion system for X & Y axis and rigid gantry and frame structure, resulting in fast acceleration, fast positioning speeds and fast cutting times. A user friendly touch screen CNC control allows parts to be programmed on the screen or imported from an office PC, providing flexible modes of operation.

## FEATURES

- Class leading Max Photonics Elite fibre laser source
- Precitec cutting head with auto focus and anti-collision functionality
- Beckhoff servo motors and drives
- Wittenstein rack and pinion system with automatic lubrication
- SMC automatic gas selection system
- 19" touch screen controller with part graphic view and extensive cutting parameter data base
- Automatic sheet edge detection with skew allowance
- Automatic nozzle cleaning
- Lantek nesting software
- Fast shuttle table change time
- Large window viewing area with laser protective material
- Light guard protection for shuttle table


## OPTIONS

- Upgrade to IPG YLR or YLS fibre laser source
- Precitec ProCutter 2.0 cutting head
- Automatic Nozzle Changer (with ProCutter 2.0 only)
- Automatic Nozzle Centring (with Automatic Nozzle Changer only)
- Libellula or Metalix nesting software
- Compact Loading/Unloading Tower
- CCTV view of cutting action
- Ball Transfer System
- Fume Extractor with filters
- Air Compressor and dryer

## TECHNICAL INFORMATION

|                                |       |                 |
|--------------------------------|-------|-----------------|
| Fibre laser source             |       | 2.0 kW          |
| Maximum cutting capacity       |       |                 |
| Mild steel                     | mm    | 15              |
| Stainless steel                | mm    | 8               |
| Aluminium                      | mm    | 6               |
| Brass                          | mm    | 4               |
| Copper                         | mm    | 4               |
| X Axis travel                  | mm    | 3000            |
| Y Axis travel                  | mm    | 1500            |
| Z Axis travel                  | mm    | 100             |
| Maximum sheet size             | mm    | 3000mm x 1500mm |
| Simultaneous positioning speed | m/min | 135             |
| Axis acceleration              | G     | 1.5             |
| Shuttle table exchange time    | sec   | 38              |
| Maximum table capacity         | kg    | 1250            |
| Positioning accuracy           | mm    | 0.05            |
| Length                         | mm    | 9045            |
| Width                          | mm    | 2280            |
| Height                         | mm    | 2000            |
| Weight                         | kg    | 12000           |

## OTHER IMAGES

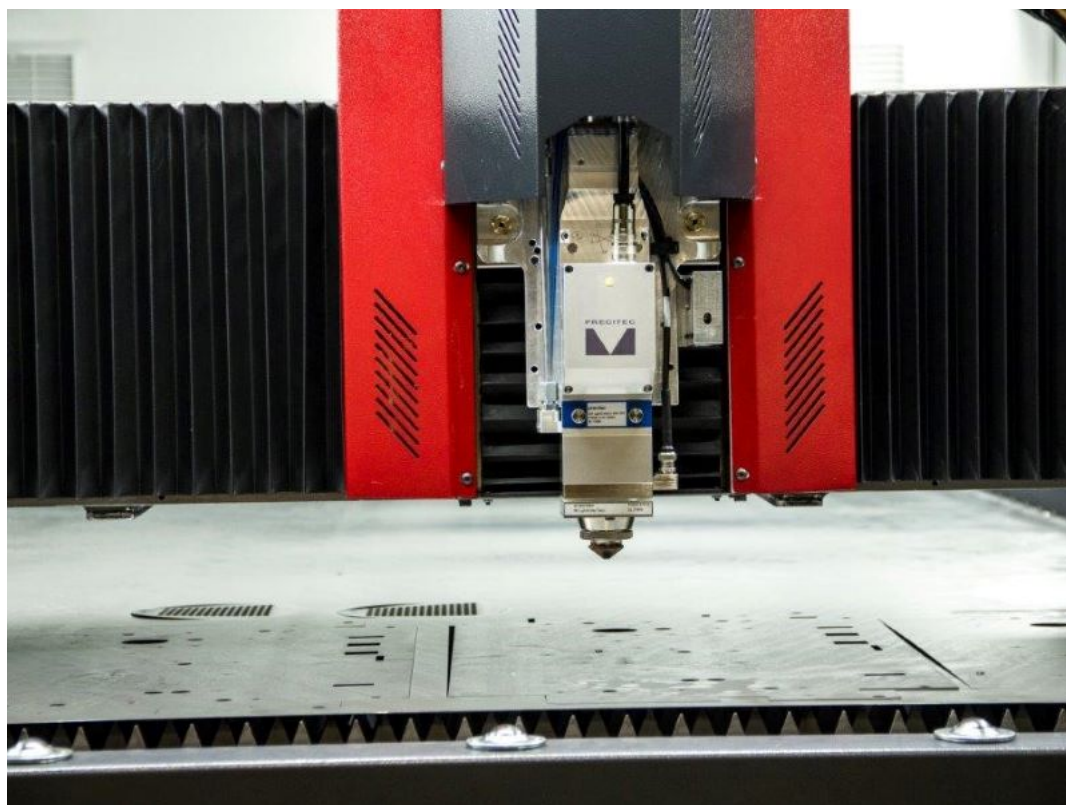

Optional Precitec LightCutter Cutting Head