

MORGAN RUSHWORTH HSR-3 80.245 HYDRAULIC SECTION RING ROLLING MACHINE

Pictured with optional NC control

The Morgan Rushworth HSR-3 range of hydraulic section bending machines are designed to roll various material sections and are available with shaft diameters from 50mm up to 120mm. All models have twin rams powering both of the lower rolls, providing pre bending capability and the convenience of performing the bending operation with the material in the horizontal position. All of the HSR-3 machines can be operated in either vertical or horizontal plain. The standard rolls supplied with the machine are hardened and have been designed to bend most sections, avoiding the cost of additional tooling. Lateral guide rolls ensure straight and true bending, or if required can be adjusted in order to spiral the material.

FEATURES

- All three rolls driven for excellent traction
- Smooth rolls ensure minimum material marking
- Hardened rolls
- Moveable control panel
- Digital read out indicating both back rolls position
- Overload protection device
- Hydraulically powered rotation
- Mechanically adjusted lateral guide rolls in 2 axis
- Variable speed of rotation


OPTIONS

- Tube/profile rolls
- Hydraulically adjusted lateral guide rolls in 2 axis
- Variable speed of rotation
- Spiral bending device
- NC control system
- CNC control system
- Digital display for guide rolls
- I-U-H profile pulling system

TECHNICAL INFORMATION

Model	HSR-3 80.245	
Flat Bar on Edge at 800mm Ø	mm	80 x 20
Flat Bar as Flat at 600mm Ø	mm	125 x 25
Square Bar at 500mm Ø	mm	45 x 45
Round Bar at 500mm Ø	mm	50
Round Tube at 1200mm Ø	mm	100 x 2.5
Round Pipe at 800mm Ø	mm	88.9 x 5.5
Rectangular Hollow Section at 800mm Ø	mm	80 x 25 x 3
Square Hollow Section at 1300mm Ø	mm	70 x 70 x 3
Angle Iron Toe Out at 800mm Ø	mm	80 x 80 x 8
Angle Iron Toe In at 700mm Ø	mm	70 x 70 x 7
Tee Section Toe Out at 800mm Ø	mm	80 x 9
Tee Section Toe In at 800mm Ø	mm	70 x 8
Tee Section Toe Up/Down at 800mm Ø	mm	80 x 9
Channel Legs Out at 900mm Ø	mm	UPN 120
Channel Legs In at 1000mm Ø	mm	UPN 120
Power	kW	4
Rolls Diameter	mm	245
Shafts Diameter	mm	80/70
Bending Speed	m/min	6
Length	mm	1450
Width	mm	1000
Height	mm	1400
Weight	Kg	1700

OTHER IMAGES

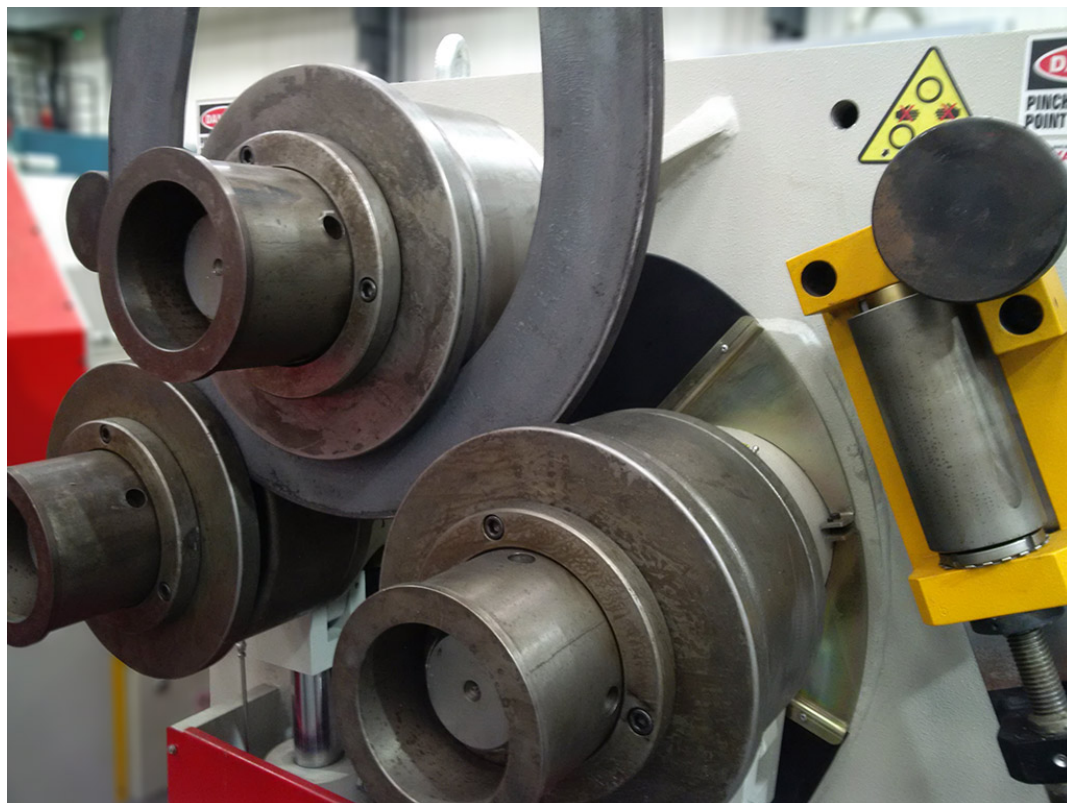

Pictured with optional NC control